




6 OUTLET AUSTRALIA POWER STRIP, 240 VAC, 10A

53326

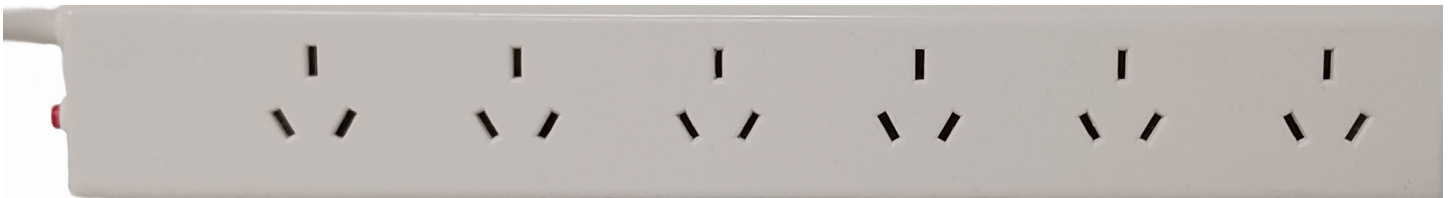

Overview:

The 53326 is a 6-outlet Australia Power Strip. It is for use Australia, New Zealand and China. It is also used in some Asian countries. It used for connecting single phase AC power to devices.

Applications:

- Used to connect devices requiring single phase AC power.
- For use in Australia, Argentina, New Zealand, Fiji, Solomon Islands, and China. For Argentina and China the Line and Neutral are reversed.

Features:

- 6-Outlets.
- 10 Amp.
- Circuit Breaker.
- Single Phase Power.
- Wall mountable.



Specifications:

ELECTRICAL:

Input Voltage:	240VAC (230-240VAC).
Maximum Current:	10 Amps.
Frequency:	50 Hz.
Number of Outlets:	6.
Outlets:	AS/NZS 3105, TYPE I
Mating Plugs:	AS/NZS 3112
Cord:	HPM 4V-75 1.0mm ² , 250/440V, 75°C. (17 AWG).

MECHANICAL:


Dimensions:	12.3" L x 1.9" W x 1.0" D (312mm L x 47mm W x 26mm D).
Weight:	0.35lbs (0.16kg.)

CERTIFICATIONS and Approvals:	ESO150001, Q041697 QUEENSLAND (ESO), RCM MARK .
--------------------------------------	---

MATING PLUG



AS/NZS 3112

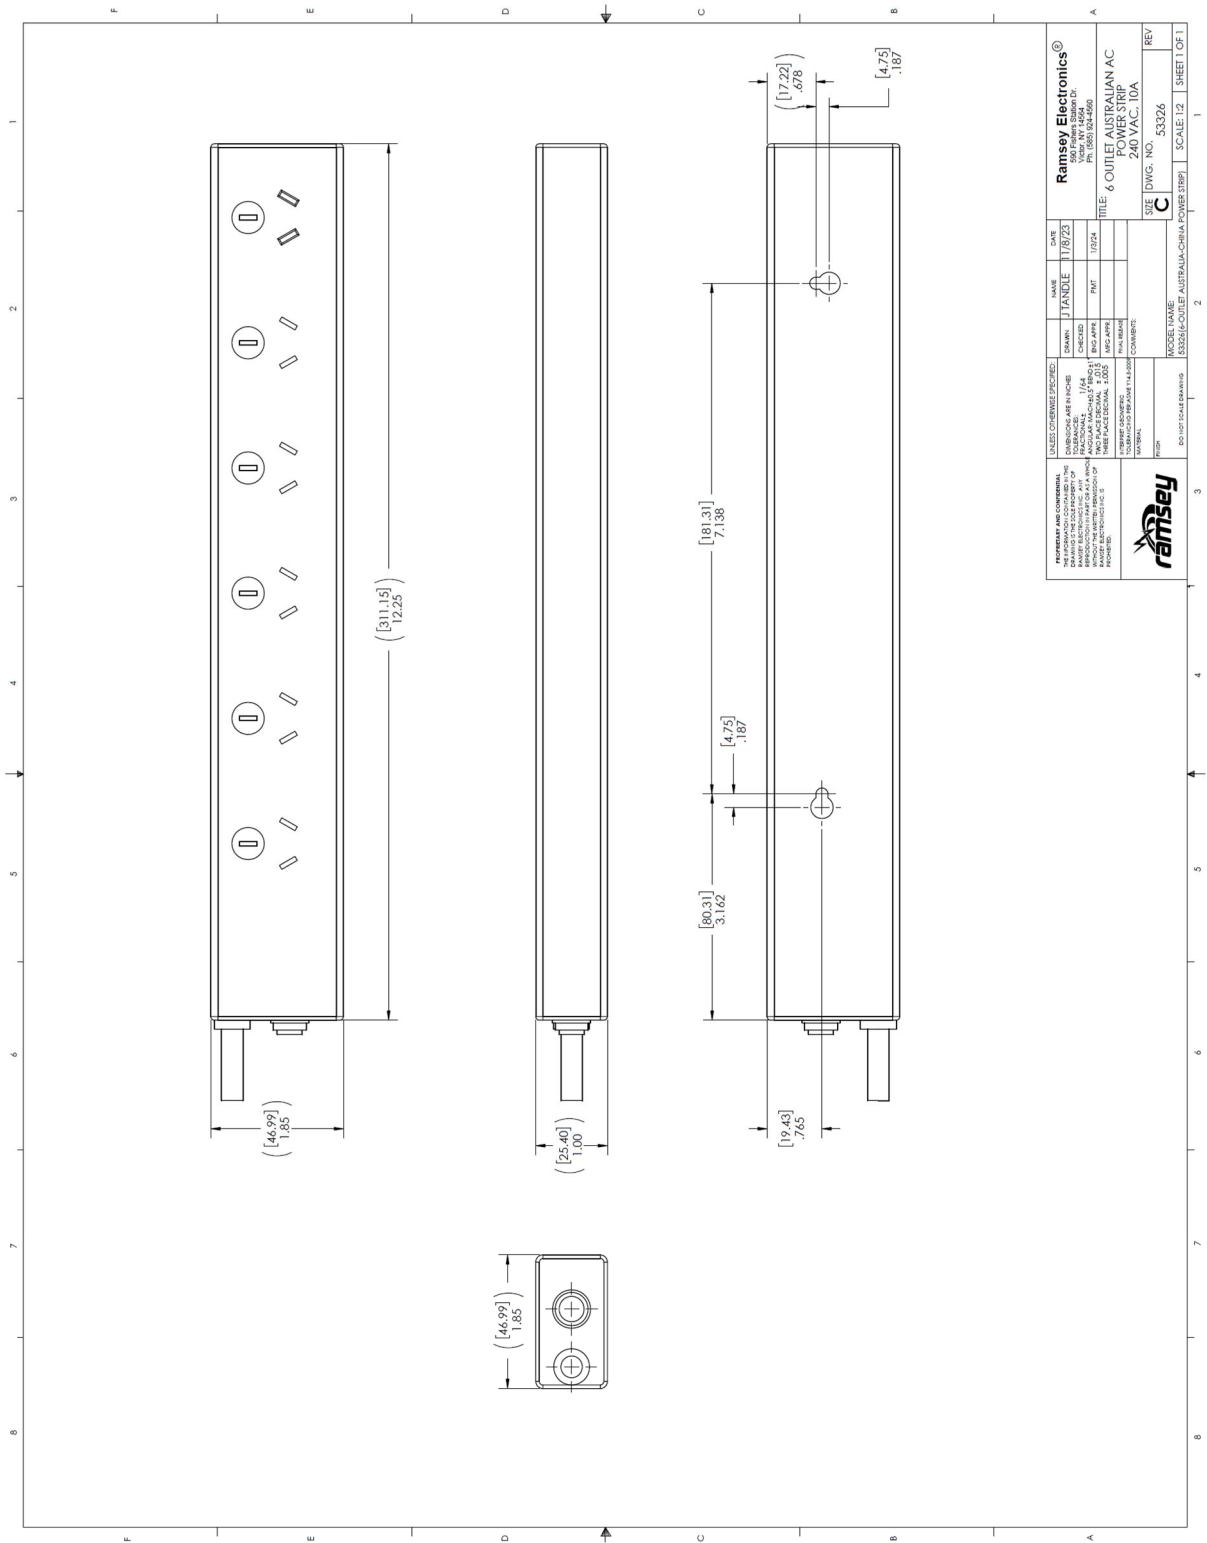

RAMSEY ELECTRONICS® 590 FISHERS STATION DRIVE VICTOR, NY 14564 (585) 924-4560 (585) 924-4555 FAX WWW.RAMSEYTEST.COM		NAME: J. TANDLE DATE: 1/18/23 DRAWN: J. TANDLE CHECKED: J. TANDLE DESIGNED: J. TANDLE TITLE: 6 OUTLET AUSTRALIAN AC POWER STRIP SIZE: DWG. NO. 53326 SCALE: 1:2 SHEET 1 OF 1
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMALS ARE TO 2 PLACES FRACTIONS ARE TO 1/32" DIMENSIONS IN PARENT HEAVY BRACKET ARE FOR INFORMATION ONLY AND ARE NOT TO BE USED FOR MANUFACTURING DIMENSIONS TO BE USED FOR MANUFACTURING ARE IN PARENT LIGHT BRACKET	PROJECT NAME: 53326 6-OUTLET AUSTRALIAN AC POWER STRIP PROJECT NO.: 53326 PROJECT DATE: 1/18/23 PROJECT LOCATION: VICTOR, NY PROJECT DRAWING NO.: 53326 PROJECT SHEET NO.: 1 PROJECT SHEET TOTAL: 1	REV: 1 REV: 2 REV: 3 REV: 4 REV: 5 REV: 6 REV: 7 REV: 8 REV: 9 REV: 10

The information in this datasheet, although believed to be accurate, is not to be taken as warranty for which Ramsey Electronics assumes legal responsibility. Ramsey Electronics reserves the right to make changes, corrections, and improvements to its products and/or this document at anytime without notice.